

# Frequency Inverter



## VFD500 Series High Performance AC drive



— We can do it more! —

### ShenZhen VEIKONG Electric CO.,Ltd.

Factory address: 4F, Building 5, Dongluyang Industrial, Park, No.4 Tengfeng 4th Road,

Fuyong Phoenix Third, Industrial Zone, Baoan District, Shenzhen, China

Phone number: +8675589587650

Website: [www.veikong-electric.com](http://www.veikong-electric.com)

[www.veikong.com](http://www.veikong.com)

ShenZhen VEIKONG Electric CO., Ltd.

VEIKONG INDUSTRIAL CO.,LIMITED (HK)



# COMPANY PROFILE



Professional R&D team

# 20+

Over 20 years of  
professional  
management experience



# VEIKONG

## Brief introduction

Shenzhen VEIKONG ELECTRIC CO., LTD is a reputable high-tech enterprise that specializes in researching, manufacturing, and trading both medium and low voltage inverters and solar pumping inverter. We offer our clients integrated system solutions, and our professional R&D team and devoted management with over 20 years of experience have made us one of the first independent AC drives companies in China.

We incorporate latest high efficiency mppt calculations and SPWM, sensorless vector control, and vector and torque control technology into our VFD and solar pump inverter which have reached international advanced standards, making them able to directly replace and be equivalent to Europe, the United States, Japan, and other brands, providing our clients with the highest level of technical support.

Quality is the foundation of our enterprise, and we consistently follow ISO9001 standards to manage and supervise quality. Our products have passed CE and IEC certifications and other technical approvals, and we continuously upgrade our technologies and products to better meet our customers' requirements and market needs.

VEIKONG team believes that the customer is the source of our enterprise. We take great pride in placing our customers' requirements first and ensuring that we meet and exceed their expectations. Our products have been widely used in various industries, including solar pumping, petroleum, chemical, melting, hoisting, electric power, building materials, water supply, plastics, textiles, printing, packing, and more, to create value for our customers.

**VEIKONG**, your trusted supplier!

# COMPANY CERTIFICATIONS



VFD500  
series AC DRIVE

# Product Features

**VEIKONG**


www.veikong-electric.com  
www.veikong.com

## PRODUCT FEATURES

VFD500  
series  
AC DRIVE

### High speed stabilization accuracy, wide speed range

- Stable speed accuracy:  $\pm 0.5\%$ (V/f),  $\pm 0.2\%$ (SVC) ;
- Speed adjustment range: 1:200 ( SVC ) 、 1:1000 ( VC ) ;
- Heavy duty overload capacity : Running stably with 110% rated current in long time ;
- 150% rated current 60S ;
- 180% rated current 10S

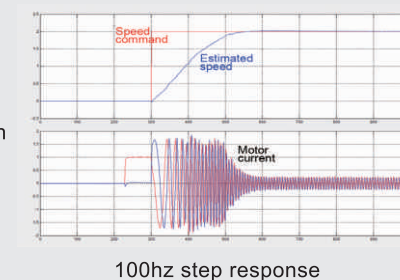


### Big torque in low frequency ,fast response for output torque

- load capacity in low frequency: VF: 150%/0.5Hz(V/f) ;
- SVC: 180%@0.25HZ



### Fast Dynamic response

In SVC mode, the acceleration and deceleration time can be set arbitrarily (even 0.0s) The inverter runs stably without alarming, esp in some occasions requiring quick response

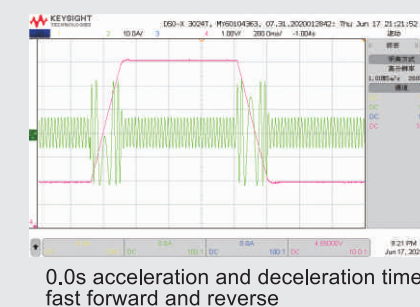




# PRODUCT FEATURES



VFD500  
series AC DRIVE

## Deceleration over excitation function


The over-excitation function is set to convert the mechanical energy of the motor when it is decelerated into motor heat to be consumed, which can shorten the deceleration time and save accessories such as braking resistors in the occasions where braking is infrequent.

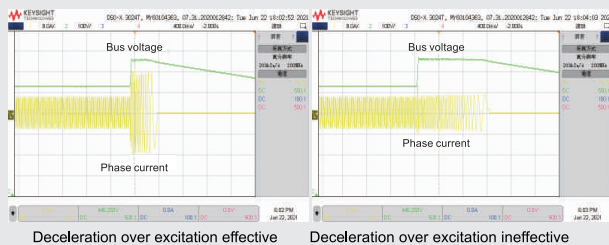

## Energy-saving operation of fans and pumps

With excellent automatic energy-saving function, only need to set the maximum energy-saving target, When the operation meets the energy-saving conditions, it can enter the automatic energy-saving state. By setting the VF function, one-to-multiple and long-distance control applications can be realized to meet the application of transformation occasions


automatic energy saving

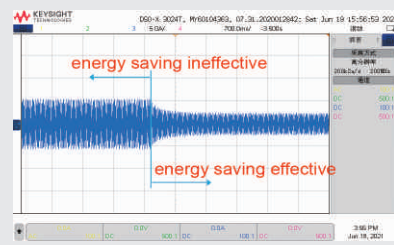

## Excellent speed tracking function


Achieve smooth start without impact for the motor which does not stop rotating

Speed tracking current waveform

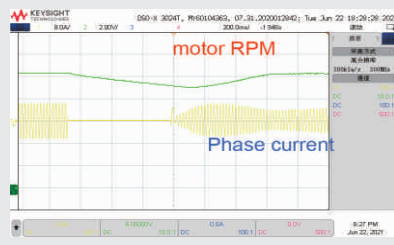

## Strong PC tool commission

Strong PC tool commission, equipped with Modbus communication as standard, up ports virtual terminals. Programmable logic applications and complete protection functions;

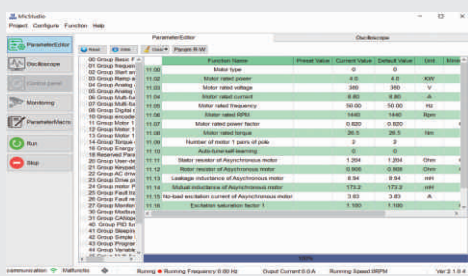


# Advanced Features



**VEIKONG**  
www.veikong-electric.com  
www.veikong.com



STO (Safe Torque Off) function

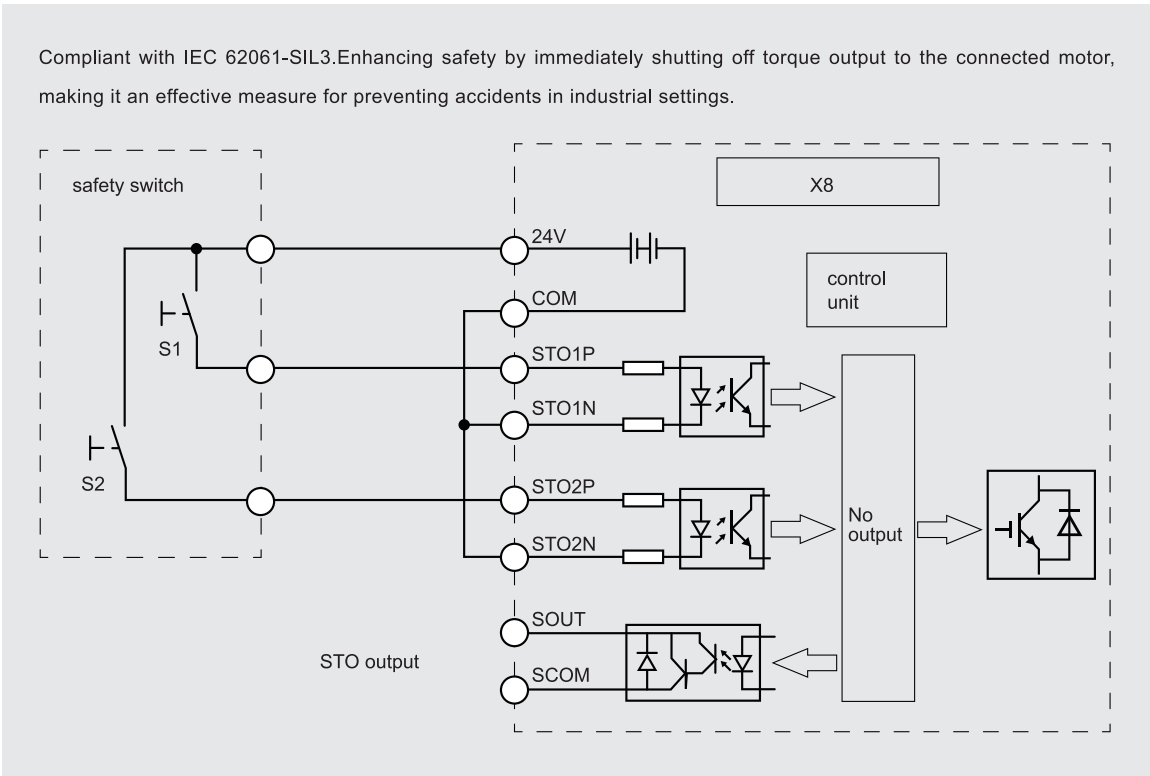

TCP protocol

VEIKONG VFD500 series are updated with TCP protocol which has the following advantages:


- 1. Reliability: TCP is a reliable protocol, ensuring that all data packets are delivered to the intended recipient.
- 2. Error-checking: TCP has built-in error-checking mechanisms, ensuring that transmitted data is accurate and error-free.
- 3. Streamlined communication: TCP minimizes unnecessary network traffic, reducing delays and improving efficiency.
- 4. Security: TCP provides encryption and authentication mechanisms for secure transmission of sensitive data.
- 5. Scalability: TCP can be easily scaled for larger networks, making it a cost-effective option in the long run.

Overall, using TCP protocol in VFD ensures efficient, secure, and reliable communication.

Fire mode in urgent situations

This safety feature prevents the VFD from shutting down for self-protection. Instead, the drive will continue the vital fan operation even with a control signal, warning or alarm. Fire mode are critical to ensuring safer evacuation of people from buildings in the event of a fire.

Activating the "Fire Mode" function in VEIKONG drives ensures safe and continuous operation in applications such as parking lot exhaust fans, smoke extraction and essential service functions.

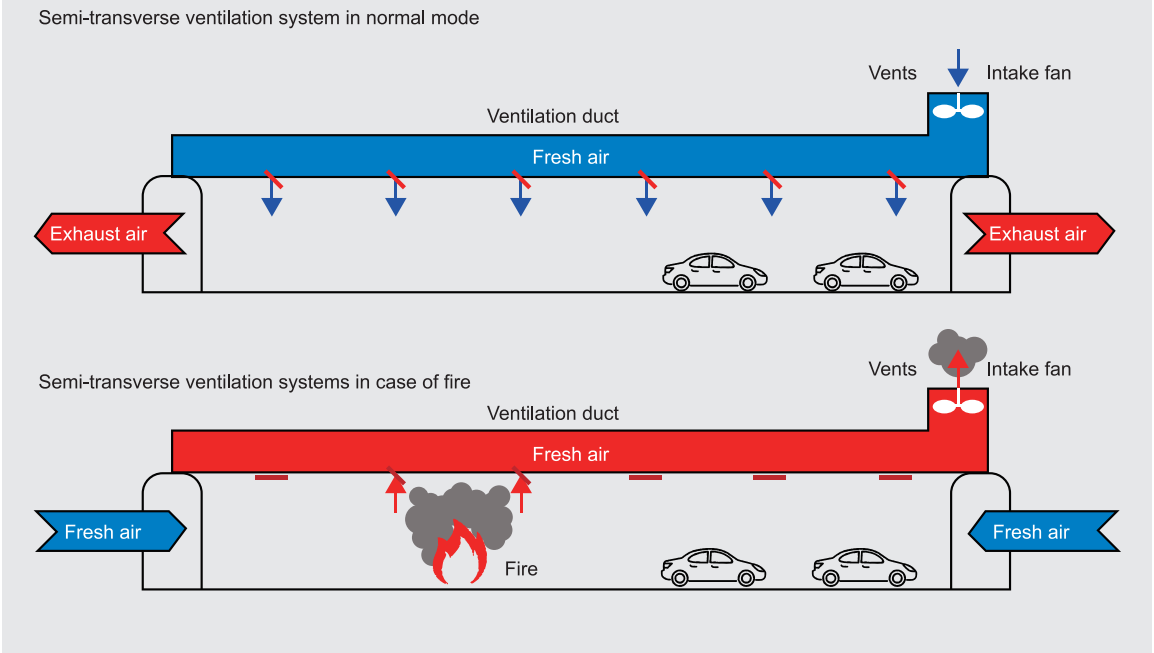

Rich communication card for options

- 1. Modbus RS485 standard
- 2. Profinet Canopen optional
- 3. Profibus is in developing

# ADVANCED FEATURES

VFD500  
series AC DRIVE


# IO 2 board wiring map

**VEIKONG**  
www.veikong-electric.com  
www.veikong.com

## IO 2 BOARD (OPTIONAL) WIRING MAP

VFD500  
series  
AC DRIVE

### IO 2 board

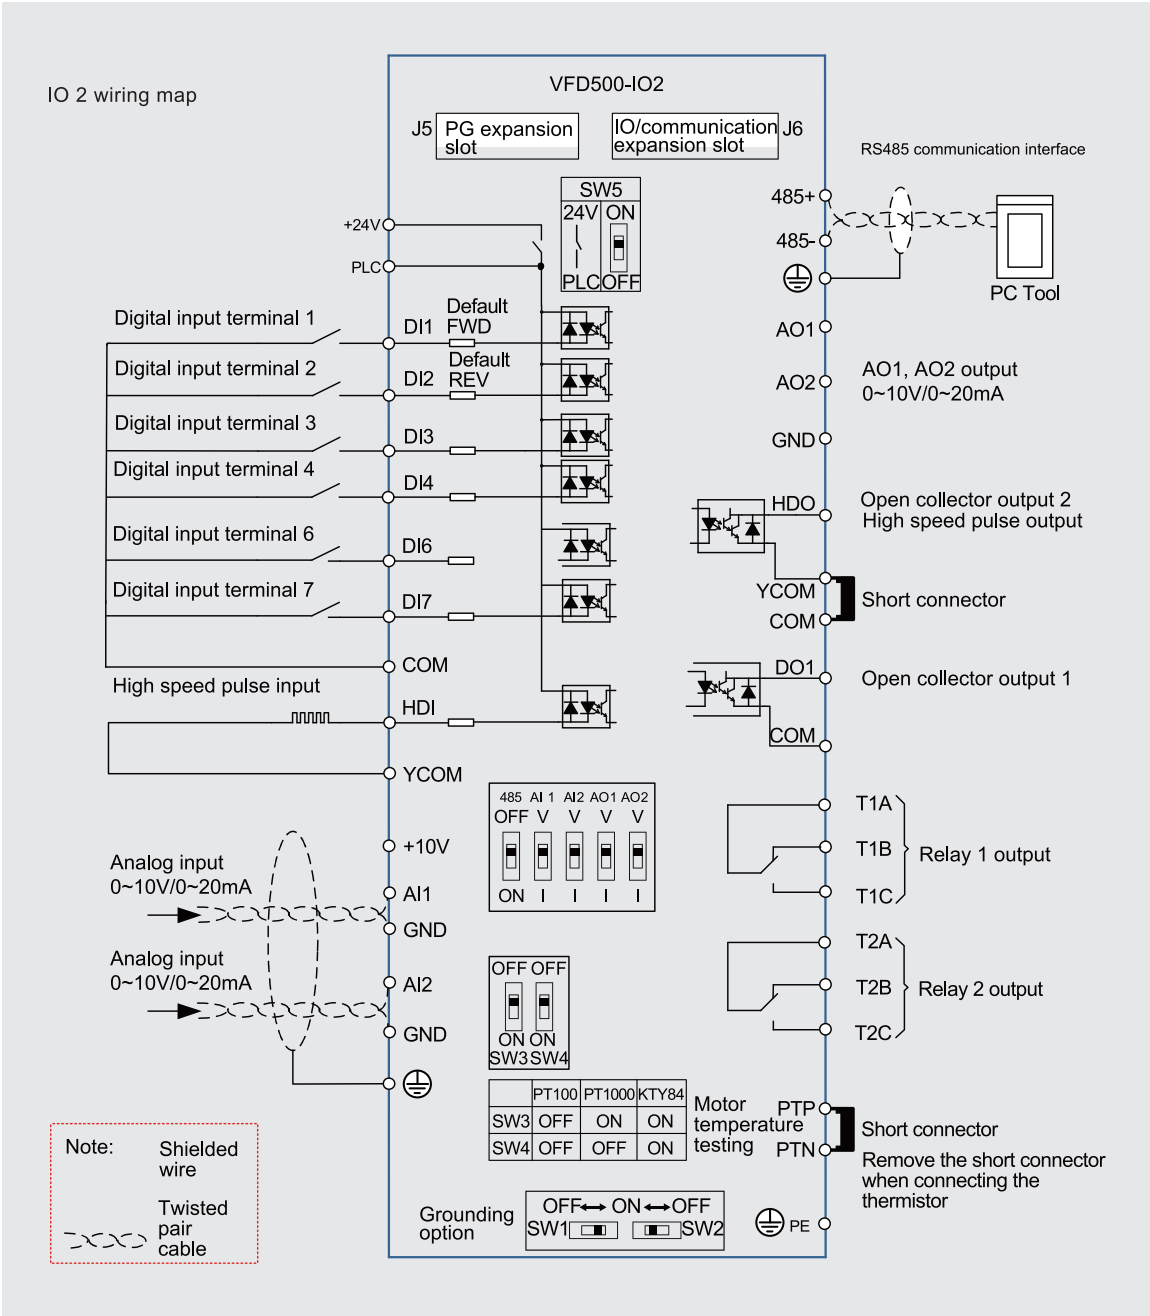


# OPTIONAL ACCESSORIES

VFD500  
series  
AC DRIVE

## Extension cards for options



CANOPEN card



Profinet card



IO extension card



Incremental PG card



Frequency division PG card



Rotary/Evolver PG card

## Multiple display for options



Version 1 LCD



Version 2 LCD



Version 2 LED



Shuttle display with  
potentiometer



Keypad bracket

## Standard built-in C3 filter for all VFD500 drives

All VFD500 VFD built-in C3 filter  
18.5-200 KW can be built-in DC reactor for options, 30-75KW can be built-in braking unit for options

## Support non-standard software custom development

VEIKONG OEM service has helped more and more clients been unique and special in his own market and grow better step by step. Besides, what makes VEIKONG different from other supplier lays on the high standard technology we can achieve for our clients like the nonstandard software custom development.

VEIKONG, your trusted supplier for higher standard VFD project!

VFD500  
series AC DRIVE

# Industrial Application



# APPLICATION OCCASIONS

VFD500  
series  
AC DRIVE

CNC machine tools




Metal wire  
Drawing  
Machines



Photovoltaic  
pumps



Large  
Grinders



Chemical  
machinery,etc

VFD500  
series AC DRIVE

# Model Instruction

VFD500 - 4R0G/5R5P - T 4 B

Product series

Model Type and power rating  
(G-General Type,P-Fan and pupm Type)

Phase(T-Three Phase,S-Single Phase)

Voltage Class  
(2-220V,4-380V,6-690V)

B means  
breaking units

**VEIKONG**  
www.veikong-electric.com  
www.veikong.com



VFD500  
series AC DRIVE


# Product Series Instruction

**VEIKONG**  
www.veikong-electric.com  
www.veikong.com

## PRODUCT SERIES INSTRUCTION



Model	Power capacity	Input current	Output current(A)		Adaptable Motor	SIZE	Brake Unit
			Heavy	Light			
Three phase: 380-480V, 50/60Hz							
VFD500-R75GT4B	1.5	3.4	2.5	4.2	0.75kW	SIZE A	Internal
VFD500-1R5GT4B	3	5	4.2	5.6	1.5kW		
VFD500-2R2GT4B	4	5.8	5.6	9.4	2.2 kW		
VFD500-4R0G/5R5PT4B	5.9	10.5	9.4	13.0	3.7 kW	SIZE B	
VFD500-5R5G/7R5PT4B	8.9	14.6	13.0	17.0	5.5 kW		
VFD500-7R5G/011PT4B	11	20.5	17.0	23.0	7.5 kW		
VFD500-011G/015PT4B	17	26.0	25.0	31.0	11 kW	SIZE C	
VFD500-015G/018PT4B	21	35.0	32.0	37.0	15 kW	SIZE D	
VFD500-018G/022PT4B	24	38.5	37.0	45.0	18.5 kW		
VFD500-022G/030PT4B	30	46.5	45.0	57.0	22 kW		
VFD500-030G/037PT4	40	62.0	60.0	75.0	30 kW	SIZE E	option
VFD500-037G/045PT4	50	76.0	75.0	87.0	37 kW	SIZE F	
VFD500-045G/055PT4	60	92.0	90.0	110.0	45 kW		
VFD500-055G/075PT4	75	113.0	110.0	135.0	55 kW		
VFD500-075G/090PT4	104	157.0	152.0	165.0	75 kW	SIZE G	External
VFD500-090G/110PT4	112	170.0	176.0	210.0	90 kW	SIZE H	
VFD500-110G/132PT4	145	220.0	210.0	253.0	110 kW		
VFD500-132G/160PT4	170	258.0	253.0	304.0	132 kW	SIZE I	

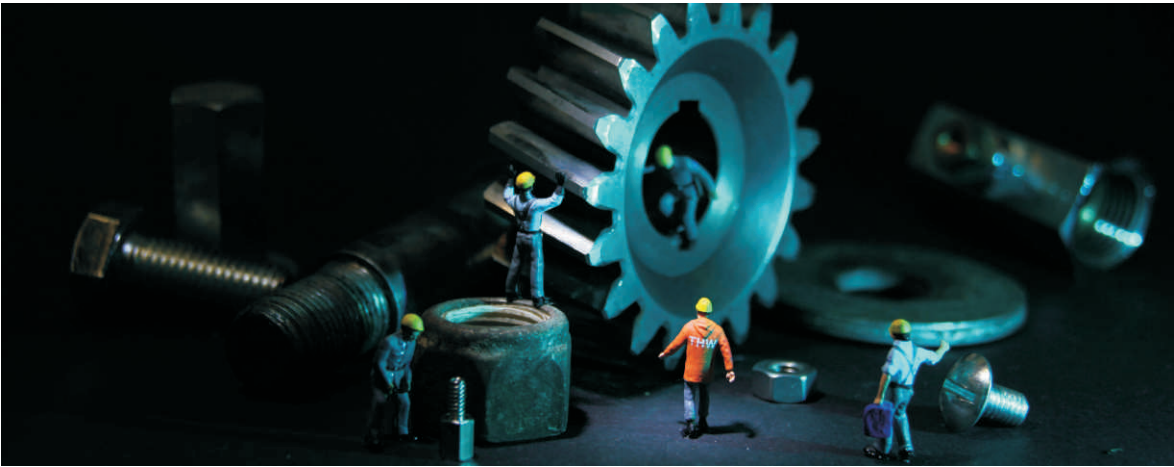

PRODUCT SERIES  
INSTRUCTION



Model	Power capacity	Input current	Output current(A)		Adaptable Motor	SIZE	Brake Unit
			Heavy	Light			
Three phase: 380-480V , 50/60HZ							
VFD500-160G/185PT4	210	320.0	304.0	360.0	160 kW	SIZE I	External
VFD500-185G/200PT4	245	372.0	360.0	380.0	185 kW	SIZE J	
VFD500-200G/220PT4	250	380.0	380.0	426.0	200 kW		
VFD500-220G/250PT4	280	425.0	426.0	465.0	220 kW	SIZE K	
VFD500-250G/280PT4	315	479.0	465.0	520.0	250 kW		
VFD500-280G/315PT4	350	532.0	520.0	585.0	280 kW	SIZE L	
VFD500-315G/355PT4	385	585.0	585.0	650.0	315 kW		
VFD500-355G/400PT4	420	638.0	650.0	725.0	355 kW	SIZE M	
VFD500-400G/450PT4	470	714.0	725.0	820.0	400 kW		
VFD500-450G/500PT4	530	810.0	820.0	900.0	450 kW		
VFD500-500G/560PT4	585	900.0	900.0	980.0	500 kW		
VFD500-560G/630PT4	660	969.0	980.0	1080.0	560 kW	SIZE N	
VFD500-630GT4	720	1100.0	1120.0	1260.0	630 kW		
VFD500-710GT4	800	1245.0	1260.0	1380.0	710 kW		
Single phase :220V ,50/60HZ							
VFD500-R40GS2B	1.3	6.0	2.5	5.6	0.4 kW	SIZE A	Inbuilt
VFD500-R75GS2B	2.4	11.0	4.2	8.0	0.75 kW		
VFD500-1R5GS2B	3.5	15.0	7.5	10.6	1.5 kW		
VFD500-2R2GS2B	5.5	25.0	9.4	14.0	2.2 kW		
VFD500-4R0GS2B	7.7	35.0	17.0	23.0	4.0 kW	SIZE B	
VFD500-5R5GS2B	8.9	53.0	25.0	31.0	5.5kW	SIZE C	
VFD500-7R5GS2B	11	67.0	32.0	37.0	7.5kW		
Three phase 220V ,50/60HZ							
VFD500-R40GT2B	4	6.0	2.5	5.6	0.4	SIZE A	Inbuilt
VFD500-R75GT2B	4	11.0	4.2	8.0	0.75		
VFD500-1R5GT2B	3.5	15.0	7.5	10.6	1.5		
VFD500-2R2GT2B	5.5	25.0	9.4	14.0	2.2		
VFD500-4R0GT2B	11	35.0	17.0	23.0	4.0	SIZE B	
VFD500-5R5GT2B	17	53.0	25.0	31.0	5.5	SIZE C	
VFD500-7R5GT2B	21	67.0	32.0	37.0	7.5		
VFD500-011GT2B	30	46.5	45.0	/	11	SIZE D	
VFD500-015GT2	40	62.0	60.0	/	15	SIZE E	
VFD500-018GT2	50	76.0	75.0	/	18.5		
VFD500-022GT2	60	92.0	90.0	/	22	SIZE F	
VFD500-030GT2	75	113.0	110.0	/	30		
VFD500-037GT2	104	157.0	152.0	/	37	SIZE G	
VFD500-045GT2	112	170.0	176.0	/	45	SIZE G	External
VFD500-055GT2	145	220.0	210.0	/	55	SIZE H	
VFD500-075GT2	145	320.0	304.0	/	75	SIZE I	

VFD500  
series AC DRIVE

Technical  
Specifications



Item		Specification
Input	Input Voltage	1phase/3phase 220V: 200V~240V 3 phase 380V-480V: 380V~480V
	Allowed Voltage fluctuation range	-15%~10%
	Input frequency	50Hz/ 60Hz, fluctuation less than 5%
Output	Output Voltage	3phase: 0~input voltage
	Overload capacity	General purpose application: 60S for 150% of the rated current Light load application: 60S for 120% of the rated current
Control	Control mode	V/f control Sensorless flux vector control without PG card (SVC) Sensor speed flux vector control with PG card (VC)
	Operating mode	Speed control、Torque control (SVC and VC)
	Speed range	1:100(V/f) 1:200( SVC) 1:1000 (VC)
	Speed control accuracy	±0.5% (V/f) ±0.2% (SVC) ±0.02% (VC)
	Speed response	5Hz(V/f) 20Hz(SVC) 50Hz(VC)
	frequency range	0.00~600.00Hz(V/f) 0.00~200.00Hz(SVC) 0.00~400.00Hz(VC)
	Input frequency resolution	Digital setting: 0.01 Hz Analog setting: maximum frequency x 0.1%
	Startup torque	150%/0.5Hz(V/f) 180%/0.25Hz 180%/0Hz(VC)
	Torque control accuracy	SVC: within 5Hz10%, above 5Hz5% VC:3.0%
	V/f curve	V / f curve type: straight line, multipoint, power function, V/f separation; Torque boost support: Automatic torque boost (factory setting),manual torque boost
	Frequency giving ramp	Support linear and S curve acceleration and deceleration; 4 groups of acceleration and deceleration time, setting range 0.00s ~60000s
	DC bus voltage control	VdcMax Control: Limit the amount of power generated by the motor by adjusting the output frequency to avoid over-voltage trip; VdcMin control: Control the power consumption of the motor by adjusting the output frequency, to avoid jump undervoltage fault
	Carrier frequency	1kHz~12kHz(Varies depending on the type)
	Startup method	Direct start (can be superimposed DC brake); speed tracking start
	Stop method	Deceleration stop (can be superimposed DC braking); free to stop


Item		Specification
	Main control function	Jog control, droop control, up to 16-speed operation, dangerous speed avoidance, swing frequency operation, acceleration and deceleration time switching, VF separation, over excitation braking, process PID control, sleep and wake-up function, built-in simple PLC logic, virtual Input and output terminals, built-in delay relay, built-in comparison unit and logic unit, parameter backup and recovery, perfect fault record, fault reset, two groups of motor parameters freely switch, software swap output wiring, terminals UP / DOWN
Function	Keypad	LED Digital keyboard and LCD keypad(option)
	Communication	Standard: MODBUS communication Option:Profinet and CAN OPEN
	PG card	Incremental Encoder Interface Card (Differential Output and Open Collector), Rotary transformer Card
	Input terminal	Standard: 5 digital input terminals, one of which supports high speed pulse input up to 50kHz; 2 analog input terminals, support 0~10V voltage input or 0~20mA current input; Option card: 4 digital input terminals 2 analog input terminals.support-10V- +10V voltage input
	Output terminal	Standard: 1 digital output terminal; 1 high-speed pulse output terminal (open collector type), support 0~50kHz square wave signal output; 1 relay output terminal 2 analog output terminals, support 0~20mA current output or 0~10V voltage output; Option card: 4 digital output terminals
Protection	Refer to Chapter 6 "Troubleshooting and Countermeasures" for the protection function	
Environment	Installation location	Indoor, no direct sunlight, dust, corrosive gas, combustible gas, oil smoke, vapor, drip or salt.
	Altitude	Lower than 1000 m
	Ambient temperature	-10°C~+40°C (derated if the ambient temperature is between 40°C and 50°C)
	Humidity	Less than 95%RH, without condensing
	Vibration	Less than 5.9 m/s <sup>2</sup> (0.6 g)
	Storage temperature	-20°C ~ +60°C
Others	Installation	Wall-mounted, floor-controlled cabinet, transmural
	Protection level	IP20
	Cooling method	Forced air cooling

PRODUCT SPECIFICATION

VFD500  
series AC DRIVE

# Standard Wiring Diagram

# STANDARD WIRING DIAGRAM

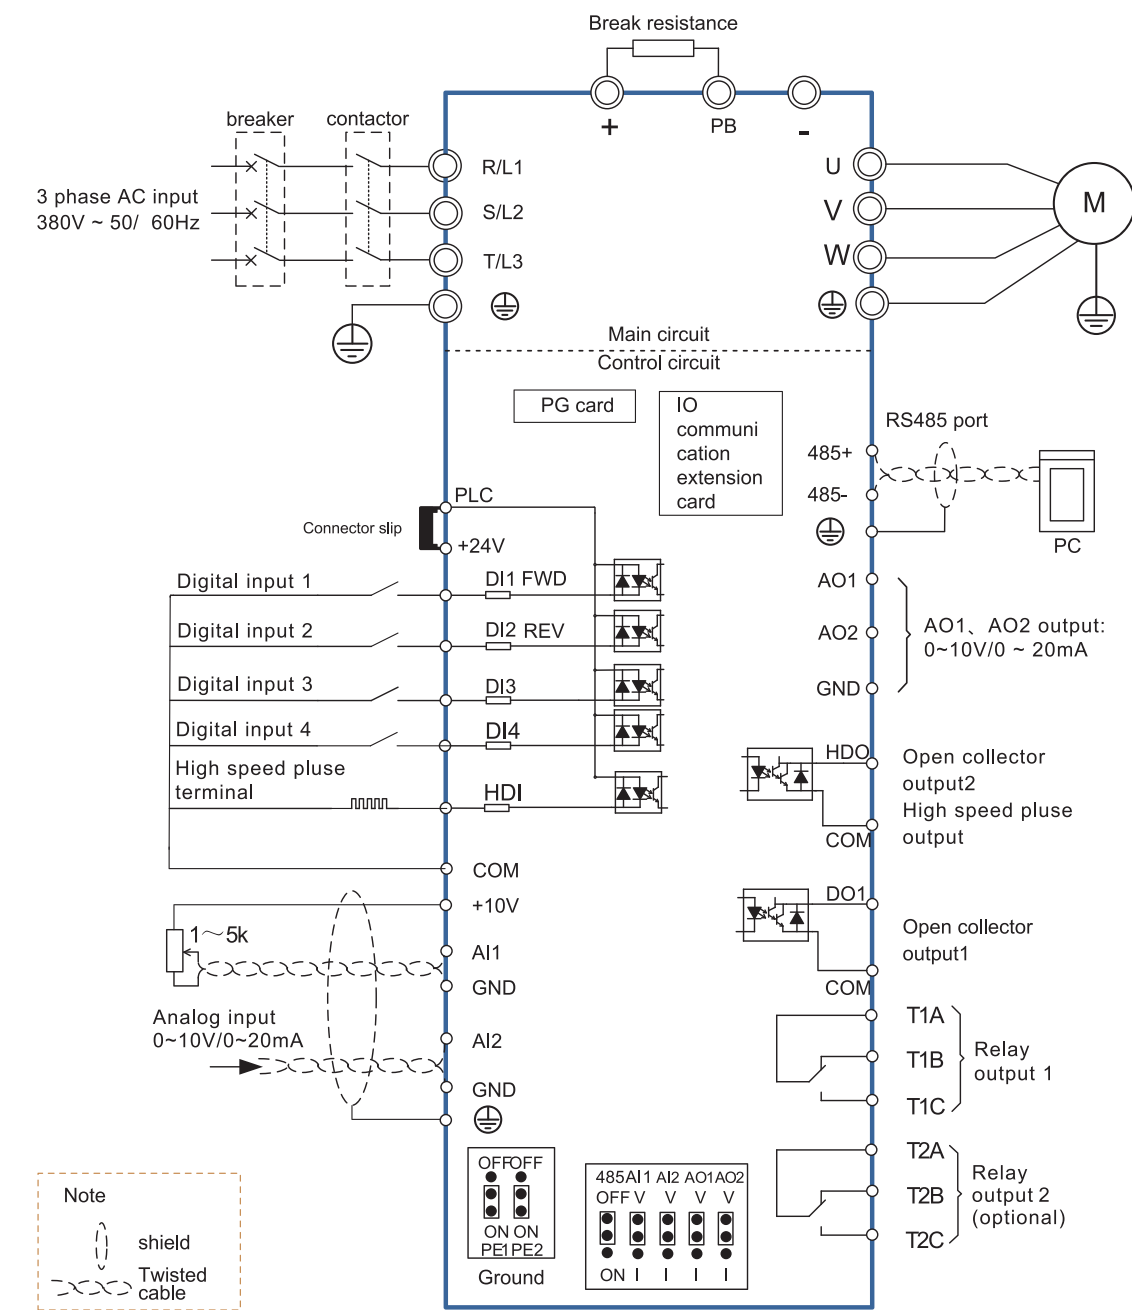

VFD500  
series AC DRIVE


# Product Appearance and Installation dimension

**VEIKONG**  
[www.veikong-electric.com](http://www.veikong-electric.com)  
[www.veikong.com](http://www.veikong.com)


## PRODUCT APPEARANCE AND INSTALLATION DIMENSION

VFD500  
series  
AC DRIVE

### SIZE J

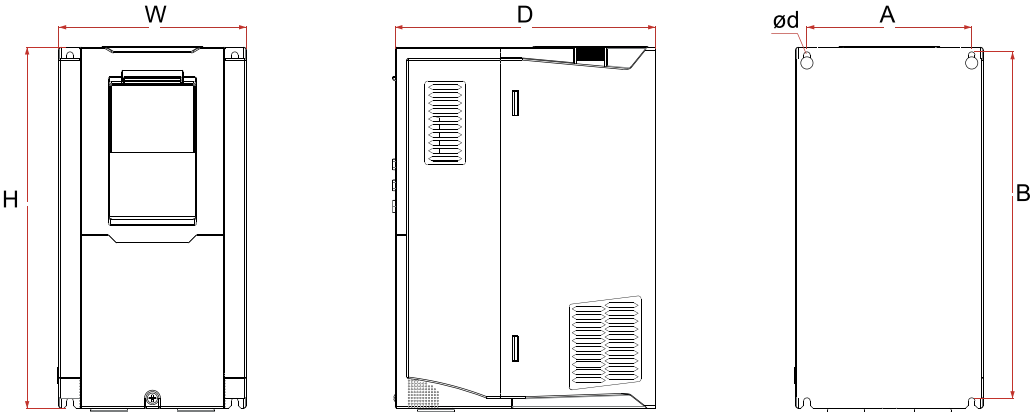

### SIZE J1

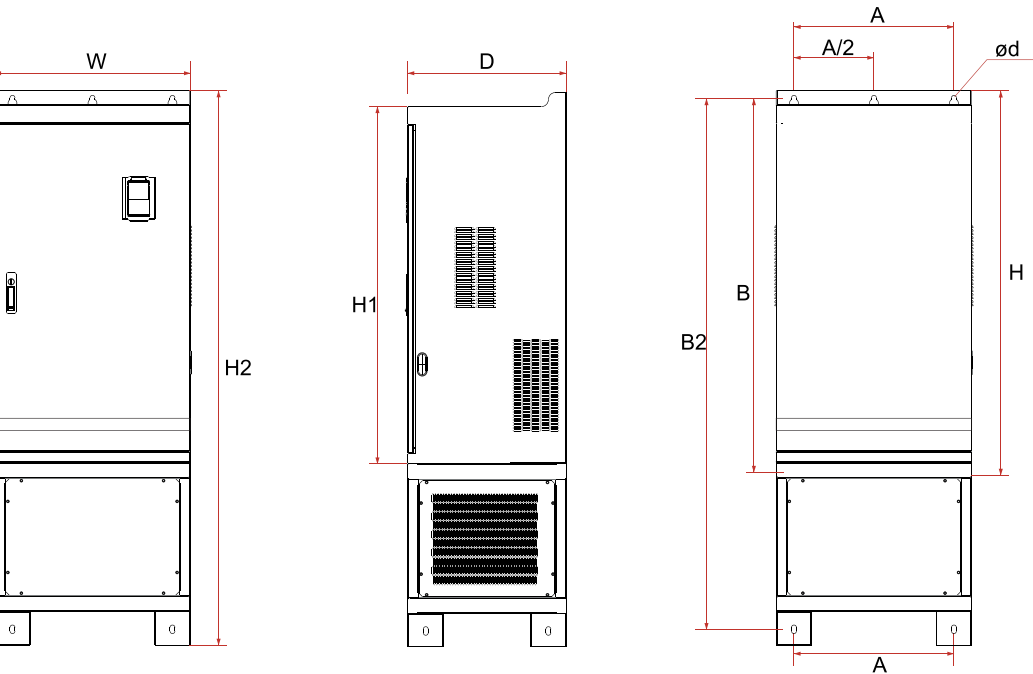



PRODUCT SIZE



SIZE	Appearance and installation dimension (mm)									
	A	B	B2	H	H1	H2	W	D	fd	Mountion
0.75KW-4KW	87	260.5	/	215	/	/	100	170	ø5.0	M4*16
5.5KW-7.5KW	113	239.5	/	250	/	/	130	180	ø5.0	M4*16
11KW-15KW	153	299	/	310	/	/	170	193	ø6.0	M5*16
18.5KW-22KW	165	350	/	370	335	/	210	196	ø6.0	M5*16
30KW-37KW	218	438	/	452.5	424	/	260	230	ø7.0	M6*16
45KW-55KW	250	535	/	555	520	/	320	275	ø10.0	M8*20
75KW-90KW	280	620	/	640	605	/	350	290	ø10.0	M8*20
110KW	280	695	915	715	660	935	370	313	ø11.0	M8*25
132KW-160KW	280	705	925	725	670	945	360	338	ø11.0	M8*25
185KW-200KW	360	795	1145	816	762	1166	490	358	ø11.0	M10*25
220KW-250KW	360	795	1145	816	762	1166	490	358	ø11.0	M10*25
	Flooring mounting:H2*W*D=1166*490*358									
280KW-315KW	450	1045	1495	1075	1005	1560	550	450	ø13.0	M12*30
	Flooring mounting:H2*W*D=1560*550*450									
355KW-400KW	630	1013	1425	1045	970	1495	730	450	ø13	M12*30
	Flooring mounting:H2*W*D=1495*730*450									
450KW-500KW	660	1063	1505	1095	1020	1575	785	450	ø13	M12*30
	Flooring mounting:H2*W*D=1575*785*450									
560KW-710KW	Only for Flooring mounting:H2*W*D=1800x1080x500									M12*30



www.veikong-electric.com  
www.veikong.com